


# F0626L (pull type)

## DRAWING (mm)



## PHOTO

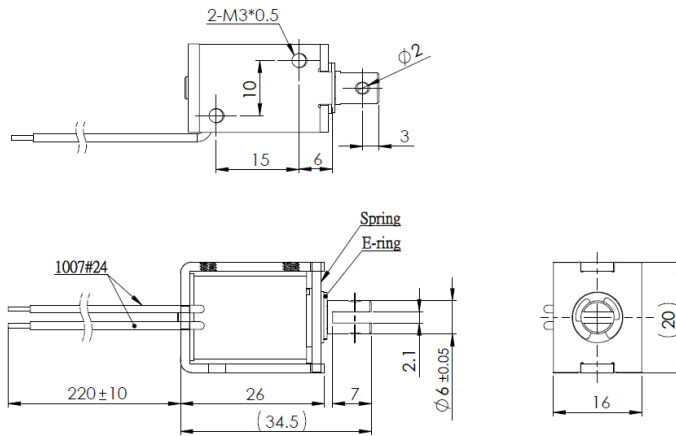

## MODEL NO. DESIGNATION

F0626L - VOLTAGE  
Example: F0626L-12V

SOLENOID DATA				
Duty cycle / ED (%) ▶	Continuous (100%)	Intermittent (50%)	Intermittent (25%)	Intermittent (10%)
Watts @ 20°C ▶	2.1	4.2	8.4	21
Maximum time in energized state (in seconds) ▶	∞	55	19	3
Part ▼	Resistance (20°C) ± 10% (Ω) ▼	DC Volts (V) ▼		
F0626L-06V	17.1	6	8.5	12
F0626L-12V	69	12	17	24
F0626L-24V	339	24	34	48

SOLENOID FEATURES AND STANDARD DATA		
	STANDARD	CUSTOMIZATION OPTIONS
Type	Pull type DC solenoid	Push type DC solenoid
Cable	Flying wire 230mm	Length, type and connector
Voltage	6 to 24 VDC @ 100% ED	Other voltages upon request
Life time	At least 500.000 single strokes	
Plunger material	Carbon steel 12L14	
Protection class	IP00	
Insulation grade	B	
Operating temperature	-5°C ... +40°C	
Manufacturing quality standards	ISO9001:2008, ISO/TS 16949:2002	
RoHS compliance	Yes	
CE approval	No	
UL approval	No	

ADDITIONAL DATA	
Return spring	Yes
Weight	43g

SPRING DATA	
Loading force @ 1mm compression	30g



## DIAGRAM

